
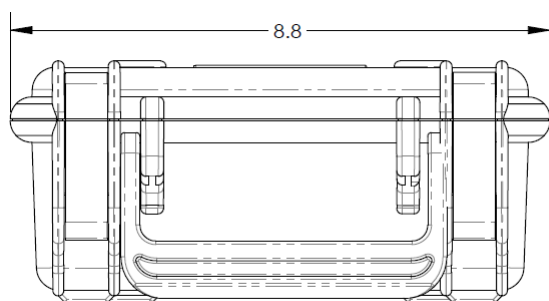


Portable PPM Oxygen Analyzer with USB Data Logging

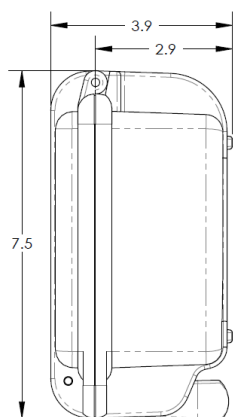

0 - 10 PPM Low Range; 0 - 25% High Range

Large Backlit Display w/ User Friendly Menu

Data Log via Removable USB Flash Drive

Swagelok Quick Disconnect Isolation

Continuous Analysis during Charging

Electrochemical Sensor Technology

Specifications:

Accuracy:	< 1% of Full Scale Range*
Calibration:	Periodically
Analyzer Range:	0-10/100/1000/10000ppm/25%
Output:	0 - 1V DC
Data Logging:	Removable USB Flash Drive
Battery Indicator:	Integrated into Display
Power:	Rechargeable Battery 100 - 240 VAC AC Adapter
Classification:	IP66 / NEMA4X
Display:	Integrated w/ Backlight
Dimensions:	8.80 x 7.50 x 3.90 inch
Enclosure:	Rugged Polypropylene
Weight:	4.8 lbs
Flow Rate:	0.5 - 5 SCFH
Pressure:	0.1 - 50 PSIG
Temperature:	0 to 50° C
Temperature Compensation:	Integral
Gas Connections:	1/8" Tube Fittings
Sensor Warranty:	12 months
Analyzer Warranty:	12 months

*Accuracy at constant conditions

Optional Accessories:

- Optional Ranges: Fully Configured From Factory
- TO2-2x Oxygen Sensor with > 0.5% CO2 Present
- Integral Sampling Pump (OMD-580P)
- TO2-19 Hybrid Oxygen Sensor, 50 ppm - 25%

Applications:

- Glove box or Pipeline Leak Detection
- Air Separation & Liquification
- Headspace Gas Analysis
- Beverage Grade CO2 Monitoring
- Heat Treating & Bright Annealing
- Inert Gas Welding of Exotic Materials



"Inquiry for Application Expertise"

Published: 3/30/2026

Designed, Tested, and Assembled in California, USA

4405 E. Airport Dr. #100 Ontario, CA 91761 USA : 1-949-398-2879 : sales@sso2.com : www.sso2.com